

# petMAP<sup>TM</sup> XM

## Xpandable Monitor

# The First Choice. The Best Care.

*Portable veterinary monitors  
redefining innovation in animal health.*



### Buy a Base Unit:

- ECG (surface leads / ESO)
- Heart Rate
- Temperature
- Pulse Ox options

### Then, add Optional Modules:

- EtCO2 with capnograph
- Blood Pressure

**SCAN FOR  
MORE!**



- Easy to use “no menu” touch screen display
- Bluetooth connection to petMAP Remote Display
- SD memory card to record all BP/HR values on screen image for data transfer
- 4 AA Rechargeable batteries included
- O2 saturation option with pleth display
- Temperature monitoring capability

7500	ECG/Temp Device with Bluetooth
7502	ECG/SpO2/Temp Device with Bluetooth
7504	ECG/NONIN* SpO2/Temp Device with Bluetooth

\*NONIN is a trademark of Nonin Medical, Inc.  
petMAP is a trademark of Ramsey Medical, Inc.



[www.petmap.com](http://www.petmap.com)

# Buy a base unit . . . then add optional modules.

## petMAP<sup>TM</sup> XM BPM Blood Pressure Module

- Modular design for movement between XM units.
- Switchable between NIBP and IAP (2 IP Channels)
- Includes 7 CritterCuffs and 2 cuff extensions.



REF#: 9050

Blood Pressure Range: Systolic BP: 40-265 mmHg  
MAP: 30-200 mmHg  
Diastolic BP: 25-195 mmHg

Heart Rate Range: 40-240 bpm

Dimensions: 4.25"H x 1.26"W x 2.62"D

Weight: 0.4 lbs

**Just Plug and Play!**



## petMAP+ II ETCO Module

- Mainstream system
- Provides capnograph, CO2 numerics (ETCO2, Insp CO2, Rt CO2) and Resp Rate from CO2
- Includes large and small airway adapters

REF#: 9078

CO2 Measurement Range: 0-150 mmHg

CO2 Accuracy: ± .43% +8% of reading


RR Accuracy: ± 1 BPM

RR Measurement Range: 0-150 BPM


For more info visit [www.petmap.com](http://www.petmap.com) or call 800.231.6370

# Stay connected. Stay informed.

## petMAP™ Remote Display

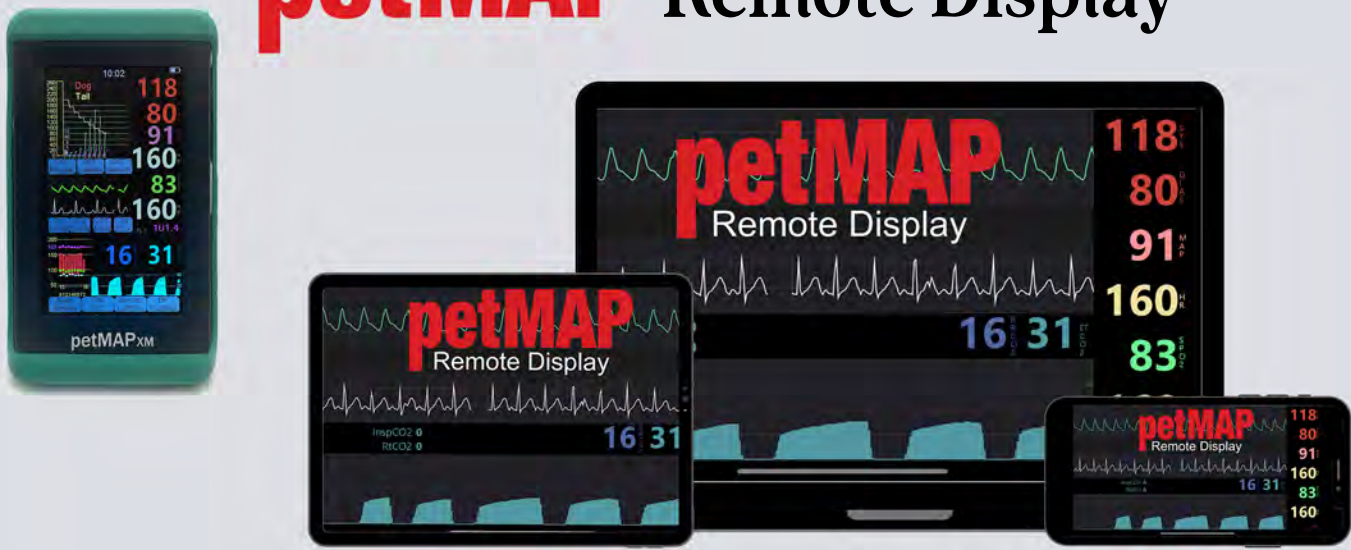

The petMAP Remote Display application allows users to view measurement results and waveforms displayed on any Bluetooth-equipped petMAP on a PC, laptop, tablet or smartphone in real time.

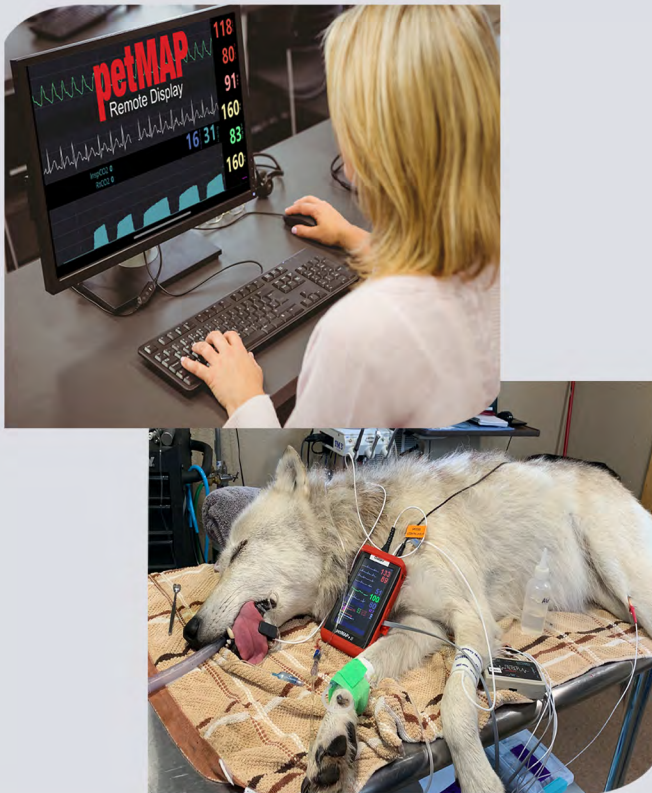

FREE to download!



Compatible with petMAP XM (7500, 7502, 7504) and petMAP +II Devices.



View measurement results and waveforms on a PC, laptop, tablet, or smartphone in real-time.



Compatible with Apple, Android and Windows devices.

**Pole Mount**  
Item #: 9042



**Table Mount**  
Item #: 9045



**International Adaptor Plugs**  
Item #: 9008



**Protective Cover**  
Item #: 9057  
Sand, Teal, Purple



**Rectal Temp. Probe**  
Item #: 8041



**Eso. Temp. Probe**  
Item #: 8040



**Temp. Ext. Cable**  
Item #: 9014



**Optional Nonin SpO2 Sensors**  
(for use with 7504)



**Cat Catheter**  
(ECG & Temp.)  
Item #: 3205-0001



**Dog Catheter**  
(ECG & Temp.)  
Item #: 3207-0001



**3 Lead Wire Set**  
Item #: 9030



**Comfort Clips**  
Item #: 9059



**ESO Extension Cable**  
(ECG & Temp.)  
Item #: 9056



Requires Cat and Dog Catheters

**CO2 Airway Adapter**

**Large** Item #: 9034    **Small** Item #: 9035



Requires CO2 Module

**CritterCuffs - small**  
Sizes 2.0 cm-5.5 cm  
Included with BP Module



Requires BP Module

**CritterCuffs - large**  
Sizes 5, 6.5, 8, 10, 13  
Sold separately



Requires BP Module

## Device Specifications

Heart Rate Range from ECG: 40-240 bpm, +/- 3% or 3 bpm, whichever is greater

Heart Rate Range from SpO2: 40-240 bpm, +/- 5%

SpO2: +/- 3% in 80 - 100% range

Temperature: +/- 0.2°C in 29°C - 46°C range

Dimensions: 6.26"H x 3.61"W x 1.22"D

Weight: 1 lb (with batteries)

Battery: Four AA NiMH (installed)

<b>7500</b>	<b>ECG/Temp Device with Bluetooth</b>
<b>7502</b>	<b>ECG/SpO2/Temp Device with Bluetooth</b>
<b>7504</b>	<b>ECG/NONIN* SpO2/Temp Device with Bluetooth</b>

\*Nonin is a trademark of Nonin Medical, Inc.



R400510-03  
02/08/2024