

petMAPTM + II

Multi-Parameter Monitor

The First Choice.
The Best Care.

*Portable veterinary monitors
redefining innovation in animal health.*



- Easy to use “no menu” touch screen display
- Plugin CO2 and ECG modules available
- Selectable automatic BP cycle times
- SD memory card to record all BP/HR values on screen image for data transfer
- 4 AA Rechargeable batteries included
- O2 saturation option with pleth display
- Temperature monitoring capability

**SCAN FOR
MORE!**



QUICK

Most Blood Pressure values displayed in under 1 minute.



EASY

“No Menu” touchscreen display



ACCURATE

Proven petMAP Technology with PPO (petMAP Proprietary Optimizations)

7451	NIBP/Temp Device with Bluetooth
7457	NIBP/SpO2/Temp Device with Bluetooth
7455	NIBP/NONIN* SpO2/Temp Device with Bluetooth

*NONIN is a trademark of Nonin Medical, Inc.
petMAP is a trademark of Ramsey Medical, Inc.



NIBP



HR



Temp.



SpO2



ECG



CO2

www.petmap.com

Buy a base unit . . . then add optional modules.

petMAP+ II ECG Module

- Displays ECG waveform and HR
- 3 electrode system; lead II for HR
- 5 Comfort Clips included
- Esophageal catheters available
2 sizes. Displays ECG, HR and temperature



Just Plug and Play!




REF#: 9078
CO2 Measurement Range: 0-150 mmHg
CO2 Accuracy: $\pm .43\% +8\%$ of reading
RR Accuracy: ± 1 BPM
RR Measurement Range: 0-150 BPM

petMAP+ II ETCO Module


- Mainstream system
- Provides capnograph, CO2 numerics (ETCO2, Insp CO2, Rt CO2) and Resp Rate from CO2
- Includes large and small airway adapters

Stay connected. Stay informed.

petMAP™ Remote Display

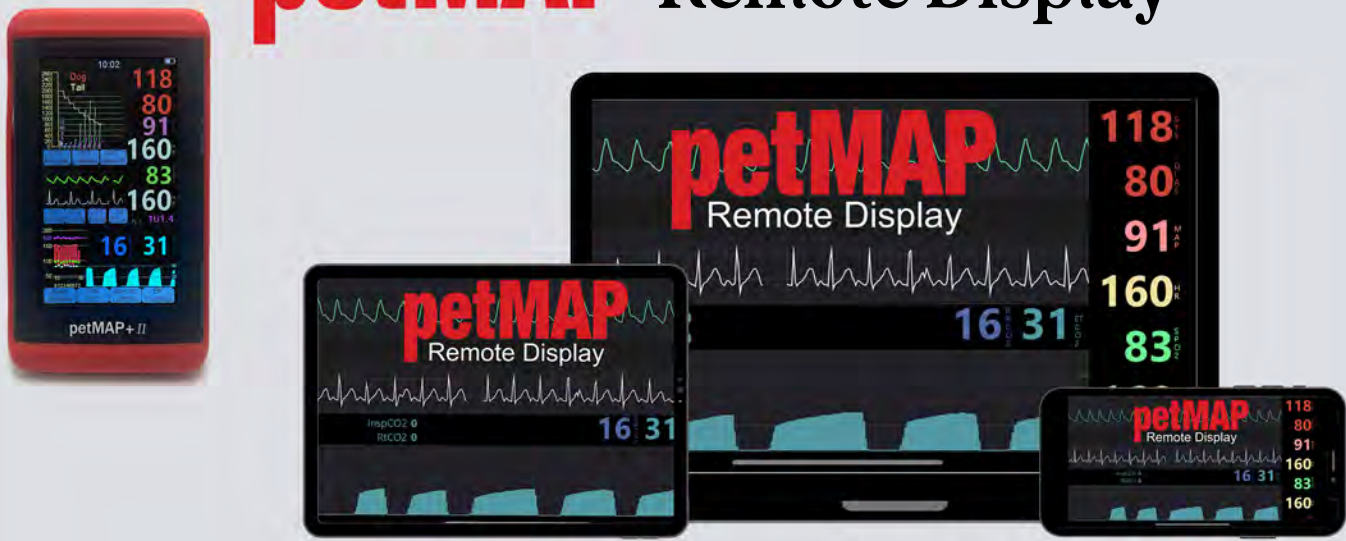

The petMAP Remote Display application allows users to view measurement results and waveforms displayed on any Bluetooth-equipped petMAP on a PC, laptop, tablet or smartphone in real time.

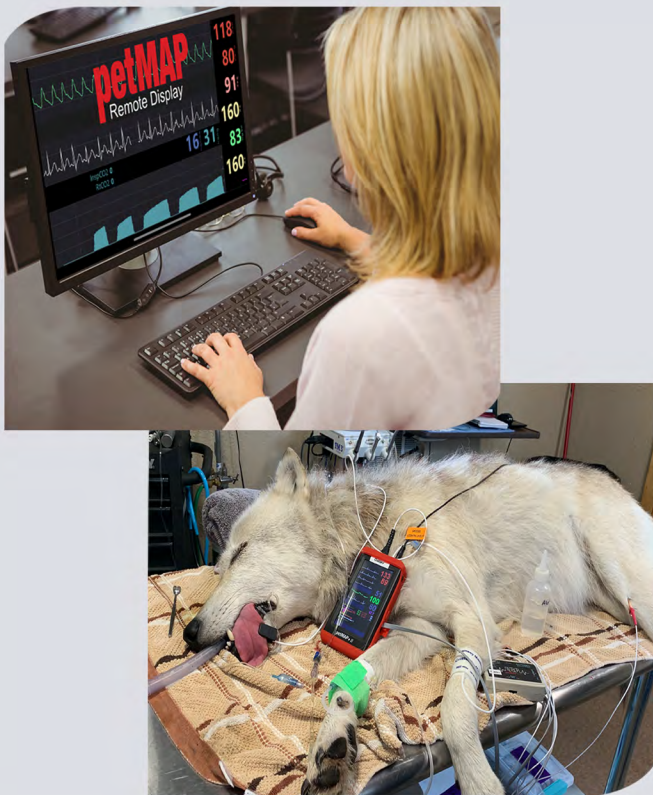

FREE to download!



Compatible with petMAP +II (7451, 7455, 7457) and petMAP XM Devices.



View measurement results and waveforms on a PC, laptop, tablet, or smartphone in real-time.



Compatible with Apple, Android and Windows devices.

Pole Mount
Item #: 9042



Table Mount
Item #: 9045



International Adaptor Plugs
Item #: 9008



Protective Cover
Item #: 9057
Black, Blue, Red, Purple



Rectal Temp. Probe
Item #: 8041



Eso. Temp. Probe
Item #: 8040



Temp. Ext. Cable
Item #: 9014



Optional Nonin SpO2 Sensors
(for use with 7404, 7454, 7455)



Cat Catheter (ECG & Temp.)
Item #: 3205-0001



Requires ECG Module

Dog Catheter (ECG & Temp.)
Item #: 3207-0001



Requires ECG Module

3 Lead Wire Set
Item #: 9030



Requires ECG Module

Comfort Clips
Item #: 9059



Requires ECG Module

CO2 Large Airway Adapter
Item #: 9034



Requires CO2 Module

CO2 Small Airway Adapter
Item #: 9035



Requires CO2 Module

CritterCuffs - small
Sizes 2.0 cm-5.5 cm
Included with petMAP



CritterCuffs - large
Sizes 5, 6.5, 8, 10, 13
Sold separately



Device Specifications

Blood Pressure Range: Systolic BP: 40-265 mmHg
MAP: 30-200 mmHg
Diastolic BP: 25-195 mmHg

Heart Rate Range: 40-240 bpm

SpO2: +/- 3% in 80 - 100% range

Temperature: +/- 0.2°C in 29°C - 46°C range

Dimensions: 6.26"H x 3.61"W x 1.22"D

Weight: 1 lb (with batteries)

Battery: Four AA NIMH (installed)

7451 NIBP/Temp Device with Bluetooth

7457 NIBP/SpO2/Temp Device with Bluetooth

7455 NIBP/NONIN* SpO2/Temp Device with Bluetooth

*Nonin is a trademark of Nonin Medical, Inc.



**SCAN FOR
MORE**

R400304-05
01/09/2024